30-INCH (22-INCH DEEP) LOW PROFILE PRO SERIES WALL HOOD SPECIFICATIONS

SPECIFICATIONS

Overall Width of Hood	30" (762 mm)
Overall Height of Hood	10" (254 mm)
Overall Depth of Hood	22" (559 mm)
Finish	Classic Stainless Steel
CFM Recommendation	1 cfm per 100 Btu/hr (.03 kWh)
Internal Blower	600 cfm included
Transition	Included
Duct Size	8" (203 mm) Round
Backdraft	Included
Discharge	Vertical
Electrical Supply Requirements	110/120 V AC, 60 Hz, 15 amp dedicated circuit
Shipping Weight	39 lbs (17.7 kg) without blower

- *Do not use with Wolf dual fuel range, gas range and rangetop models with a charbroiler or griddle.*
- *Specifications are subject to change without notice.*

OVERALL DIMENSIONS

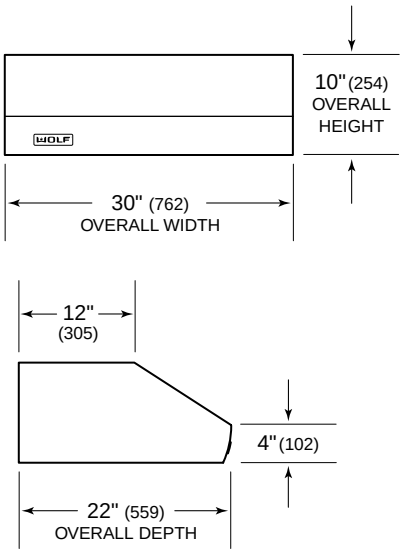

- *Dimensions may vary by ± 1/8" (3 mm).*
- *Dimensions in parentheses are in millimeters.*

BLOWER OPTIONS

600 cfm Internal Blower

ACCESSORIES

- Decorative rail in stainless steel, platinum, copper or brass
- 38" (965 mm) H stainless steel backsplash with warming rack
- 38" (965 mm) H stainless steel backsplash
- 6" (152 mm) and 12" (305 mm) duct covers

30-INCH (22-INCH DEEP) LOW PROFILE PRO SERIES WALL HOOD SPECIFICATIONS

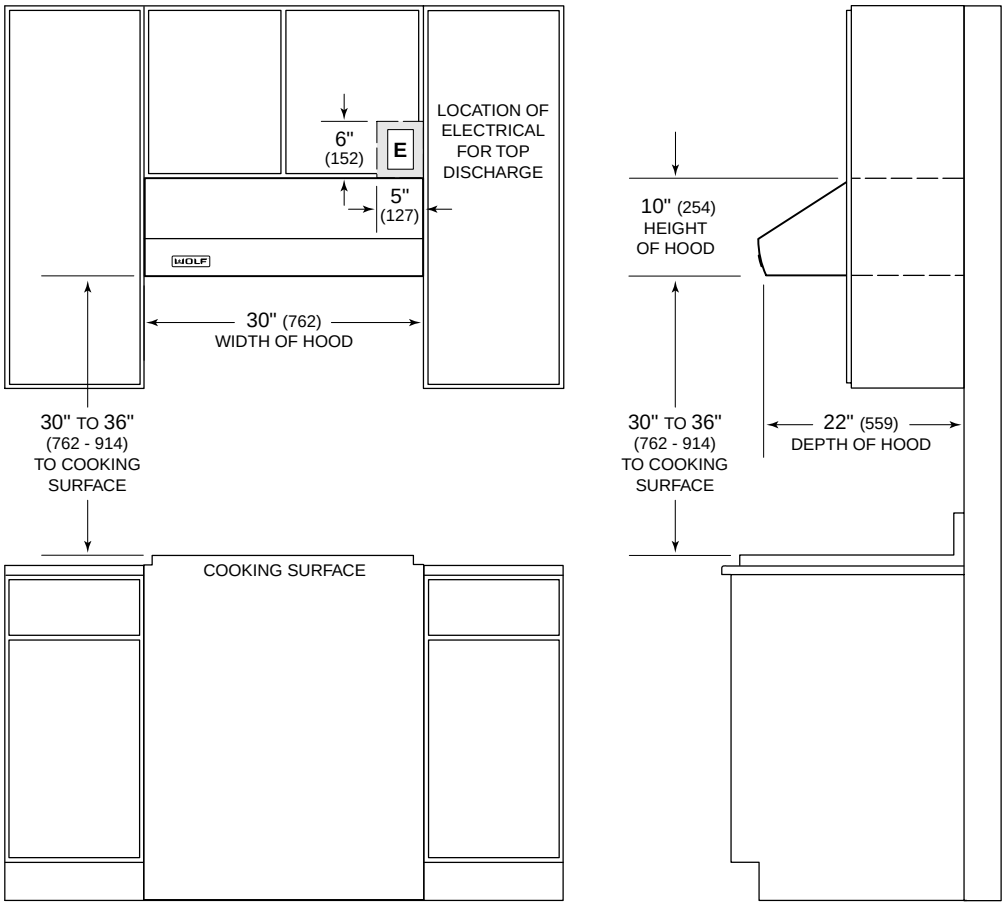

NOTE: Refer to the following page for additional details.

- *Do not use with Wolf dual fuel range, gas range and rangetop models with a charbroiler or griddle.*
- *Dimensions may vary by ± 1/8" (3 mm).*
- *Dimensions in parentheses are in millimeters.*

DIMENSIONS

Overall Width of Hood	30" (762 mm)
Overall Height of Hood	10" (254 mm)
Overall Depth of Hood	22" (559 mm)
Cooking Surface to Bottom of Hood	30" (762 mm) to 36" (914 mm)
Location of Electrical	Within shaded area

- *See Installation Instructions shipped with unit for detailed specifications.*

30-INCH (22-INCH DEEP) LOW PROFILE PRO SERIES WALL HOOD SPECIFICATIONS

PRO SERIES WALL HOODS

The Pro Series wall hoods are recommended for use with all Wolf cooking appliances, with a few exceptions for the 22" (559 mm) deep hoods. All Pro Series wall hoods are available in classic stainless steel. (R) models include mounting holes for the optional decorative rail.

22" (559 mm) Deep Wall Hoods
Available in 30" (762 mm), 36" (914 mm), 42" (1067 mm) and 48" (1219 mm) widths. (I) models include a 600 cfm internal blower. ***Do not use with Wolf dual fuel range, gas range and rangetop models with a charbroiler or griddle***.

NOTE: Rear discharge is only applicable on 22" (559 mm) wall hoods (excluding W302210I and W362210I) and 24" (610 mm) wall hoods used with a WBLOWER-120INT (804702) or any Wolf remote blower. WBLOWER-90INT (805086) is not for use in rear discharge applications.

Also available are the following hoods (see specific PDF file for additional information):

24" (610 mm) Deep Wall Hoods
Available in 30" (762 mm), 36" (914 mm), 42" (1067 mm), 48" (1219 mm), 54" (1372 mm), 60" (1524 mm) and 66" (1676 mm) widths.

27" (686 mm) Deep Wall Hoods
Available in 30" (762 mm), 36" (914 mm), 42" (1067 mm), 48" (1219 mm), 54" (1372 mm), 60" (1524 mm) and 66" (1676 mm) widths.

PLANNING AND DESIGN INFORMATION

Wolf Pro Series wall hoods are recommended for use with any Wolf cooking appliance, and should be as least as wide as the cooking surface. It is recommended that the hood overlap the cooking surface by 3" (76 mm) on either side.

Installation of all Pro Series wall hoods should be 30" (762 mm) to 36" (914 mm) from the bottom of the hood to the cooking surface.

Models W302210I and W362210I come with internal blowers, all other wall hoods are shipped without the blower assembly. The blower or ventilator assemblies are quite varied, and depending on the amount of air you want to move and the length of the duct run, you have many options. You also need to consider if you are going to use these assemblies as internal blowers or mount them externally.

Refer to the ***Pro Series Ventilation Recommendations*** charts at the end of this section or contact your Wolf dealer for additional information.

30-INCH (22-INCH DEEP) LOW PROFILE PRO SERIES WALL HOOD VENTILATION REQUIREMENTS / RECOMMENDATIONS

OPTIONAL DECORATIVE HOOD RAILS

These decorative rails can be added to any new design wall or island hood and must be ordered at the same time as the hood. When placing your order, be sure to include the proper finish code to correspond with the optional bezel package you may be requesting. They are available only with the "New Design" Pro Series Hoods.

Stainless Steel (SS) Brass (BR) Copper (COP) Platinum (PLT)

DECORATIVE HOOD RAILS

Number	Description	Hood Type
RAIL-30/__	Decorative Hood Rail	30-inch Wall Hood

PRO SERIES BACKSPLASHES

Number	Description	Hood Type
30BAK-SPLH/DF	30"W x 38"H Backsplash with 2 Warming Racks	30-inch Wall Hoods
30BAK/DF	30"W X 38"H Stainless Steel Backsplash	30-inch Wall hoods

PRO SERIES DUCT COVERS – WALL HOODS

Number	Description	Hood Type
DUC6COVER30W	6-inch Duct Cover	30-inch Wall Hoods
DUC12COVER30W	12-inch Duct Cover	30-inch Wall Hoods

MINIMUM CFM REQUIREMENTS

Pro Series Hoods	CT15E	CT15G	CT30E	CT30G	CT36E	CT36G	IG15**	IM15	IS15**	IF15**
All Hoods	215*	215*	600	600	600	600	400*	215*	215*	215*

**Use these requirements to determine total CFM when installing multiple cooking products.*

***Downdrafts are not recommended for use with IF15 or IS15.*

NOTE: CFM requirements are averages based on total BTU output. Wolf recommends 1 CFM per 100 BTU. Additional CFM required for charbroilers, griddles and long duct runs.

30-INCH (22-INCH DEEP) LOW PROFILE PRO SERIES WALL HOOD VENTILATION REQUIREMENTS / RECOMMENDATIONS

MINIMUM CFM REQUIREMENTS

Wall Hoods (22"D)	R/DF304	R/RT/DF364	R/RT/DF366	R/RT488	R/RT/DF486	R/RT/DF484	R/RT/DF482	R/DF606	R/DF604
W302210I*	600								
W362210I*	600	900	900						
W362210*	600	900	900						
W422210*		900	900						
W482210*						900	900		

**Do not use with Wolf dual fuel range, gas range and rangetop models with a charbroiler or griddle.*

NOTE: CFM requirements are averages based on total BTU output. Wolf recommends 1 CFM per 100 BTU. Additional CFM required for charbroilers, griddles and long duct runs.

BLOWER CROSS-REFERENCE

Wall Hoods – 22"D x 10"H	Blower	Number	Duct	Discharge
W302210I or W362210I	Internal 600 CFM	Included	8" Round	Vertical
W362210, W422210 or W482210	Remote 600 CFM	CTBLOWER-60REM	8" Round	Adjustable
W362210, W422210 or W482210	Remote 900 CFM	CTBLOWER-90REM	8" Round	Adjustable

NOTE: Do not use with Wolf dual fuel range, gas range and rangetop models with a charbroiler or griddle. Transition with backdraft damper included.